

SERIE EFR

Frantumatore Rotante

Rotating Pulveriser



HARDOX®
IN MY BODY

New Model

SERIE EFR

Frantumatore Rotante

Rotating Pulveriser

LA SERIE DI FRANTUMATORI ROTANTI EFR è dedicata appositamente per completare in maniera rapida, efficace e conveniente tutte le operazioni di demolizione primaria e secondaria. Costruiti con i migliori acciai **Hardox®**, possiedono un circuito rigenerativo che li pone fra i più veloci nella loro categoria per la chiusura e l'apertura a vuoto della mascella.




- Innovativo sistema di valvola "PRESSURE RELIEF"
- Valvola auto frizionante in rotazione
- Cilindri rovesciati e protetti
- Valvole di velocità
- Struttura anti-usura
- Denti intercambiabili
- Lame intercambiabili

EFR ROTATING PULVERISER have been expressly designed to accomplish quickly, effectively and advantageously all operation of primary and secondary demolition. Made of the best steel quality **Hardox®**, they have a regenerative circuit for fast jaw opening and closing, hydraulic rotation and interchangeable parts. The ratio weight/length makes this serie very suitable for the highest demolition with long arm.

- Innovative "PRESSURE RELIEF VALVE"
- Auto frictioning Rotation valve
- Reversed cylinder to protect the rod
- Fast valve
- Anti-wear body
- Interchangeable teeth
- Interchangeable blades

MODEL	Apertura A Opening A	Lunghezza B Length B	Larghezza C Width C	Lama Blade	Peso Escavatore Excavator Weight	Peso Weight	Forza Dente Teeth Force	Forza Lama Blade Force	Pressione Olio Pressure Oil	Portata Olio Oil Capacity	Pressione Olio Rotazione Rotation Oil Pressure	Portata Olio Rotazione Rotation Oil Capacity
	mm	mm	mm	mm	T	Kg	T	T	Bar	L/min	Bar	L/min
EFR07	520	1600	350	140	7/12	680	135	40	250	80/100	60	20
EFR11	650	1800	400	160	9/15	1160	150	45	310	100/150	120	20
EFR17	700	2400	500	160	15/20	1780	200	70	340	150/220	120	20
EFR21	850	2400	520	200	18/26	2050	250	80	340	210/260	120	20
EFR26	900	2500	540	240	24/32	2550	310	105	340	250/300	120	50
EFR29	1050	2700	550	240	30/40	2970	350	120	340	300/350	120	50
EFR39	1150	2900	570	240	38/55	3950	500	140	340	300/350	120	50
EFR61	1300	3300	650	240	50/80	6100	550	175	340	300/350	120	50
EFR78	1350	3500	650	300	70/90	7800	600	200	340	400/500	120	50
EFR101	1750	3800	650	300	90/120	10080	700	250	340	500/600	120	50

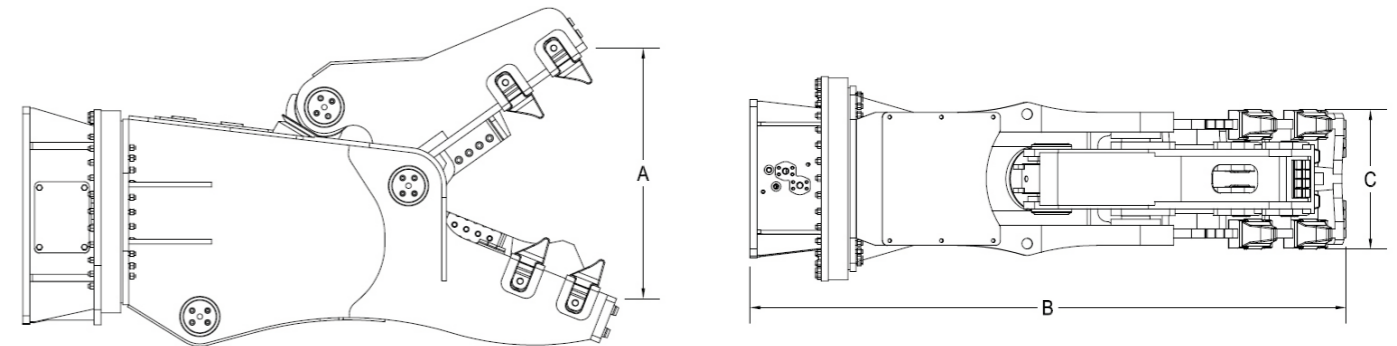

Arox è parte del gruppo:



Arox Group S.r.l.s.
Como • Italy • Tel. +39 031 41 54 084 • +39 388 4312670
info@aroxdemolitiontools.com • www.aroxdemolitiontools.com

