

SERIE EFF

Frantumatore Fisso

Fix Pulveriser




HARDOX®
IN MY BODY

SERIE EFF

Frantumatore Fisso

Fix Pulveriser

MODEL	Apertura A Opening A	Lunghezza B Length B	Larghezza C Width C	Lama D Blade D	Peso Escavatore Excavator Weight	Peso Weight	Forza Dente Teeth Force	Forza Lama Blade Force	Pressione Olio Pressure Oil	Portata Olio Oil Capacity
	mm	mm	mm	mm	T	Kg	T	T	Bar	L/min
EFF05	530	1300	340	140	6/10	500	135	35	250	80/100
EFF11	720	1900	420	160	10/16	1100	170	60	320	180/220
EFF16	830	2100	480	200	15/20	1650	200	75	320	200/240
EFF21	870	2300	560	200	21/29	2100	250	90	320	250/300
EFF28	1060	2650	580	240	30/45	2900	340	120	320	250/300
EFF45	1080	2700	610	240	40/60	4500	450	145	340	300/350
EFF54	1150	2800	770	240	60/80	5500	500	170	340	400/450
EFF105	1850	3200	960	300	80/130	10400	550	235	340	500/550

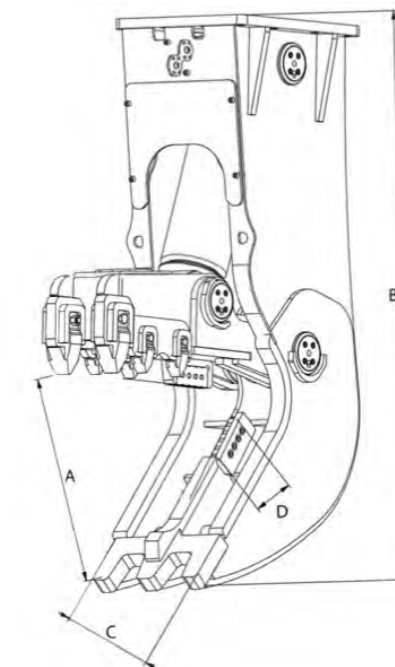

La serie di **FRANTUMATORI FISSI EFF** sono espressamente realizzati per consentire una rapida demolizione a terra: le fasi di carico e trasporto saranno semplificate, aumentando il risparmio dell'utilizzatore.



- Innovativo sistema di valvola "PRESSURE RELIEF"
- Valvola auto frizionante in rotazione
- Cilindri rovesciati e protetti
- Valvole di velocità
- Struttura anti-usura
- Denti intercambiabili
- Lame intercambiabili

EFF FIX PULVERISER are specifically to crumble quickly apart parts already on ground: loading and transport will be easier and faster, giving the opportunity to save money by the operator.

- Innovative "PRESSURE RELIEF VALVE"
- Auto frictioning Rotation valve
- Reversed cylinder to protect the rod
- Fast valve
- Anti-wear body
- Interchangeable teeth
- Interchangeable blades

Arox è parte del gruppo:



Arox Group S.r.l.s.
Como • Italy • Tel. +39 031 41 54 084 • +39 388 4312670
info@aroxdemolitiontools.com • www.aroxdemolitiontools.com

